




Spiral agitator  
IKA® TurboTron® RFG-10-SP  
37 kW, 4,8 – 18 min<sup>-1</sup>  
20–75 Hz  
by means of frequency converter

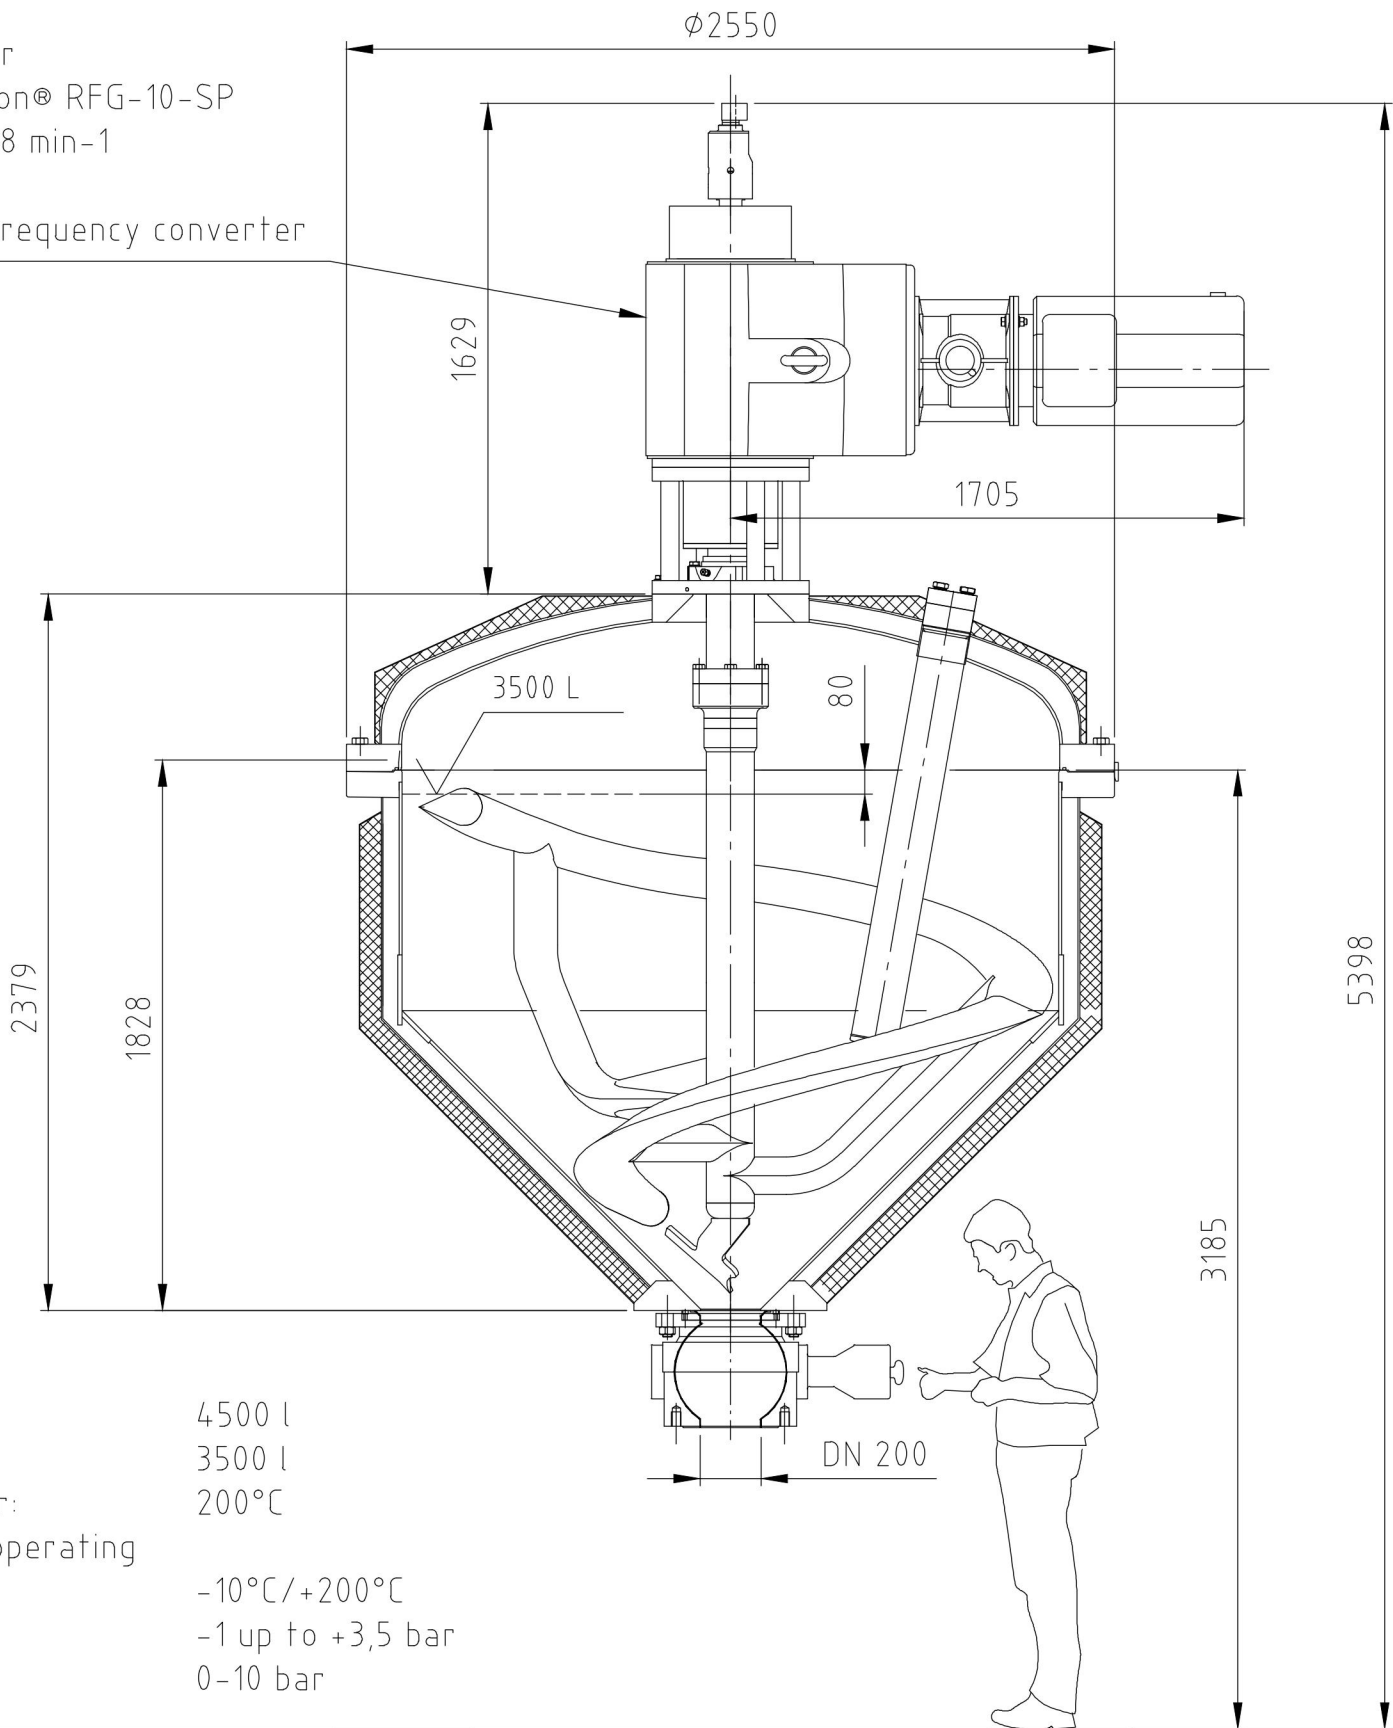

Total volume: 4500 l  
Usefull volume: 3500 l  
Operating temperatur: 200°C  
The max. admissible operating  
temperatures are:  
In the vessel: -10°C/+200°C  
in the doublejacket: -1 up to +3,5 bar

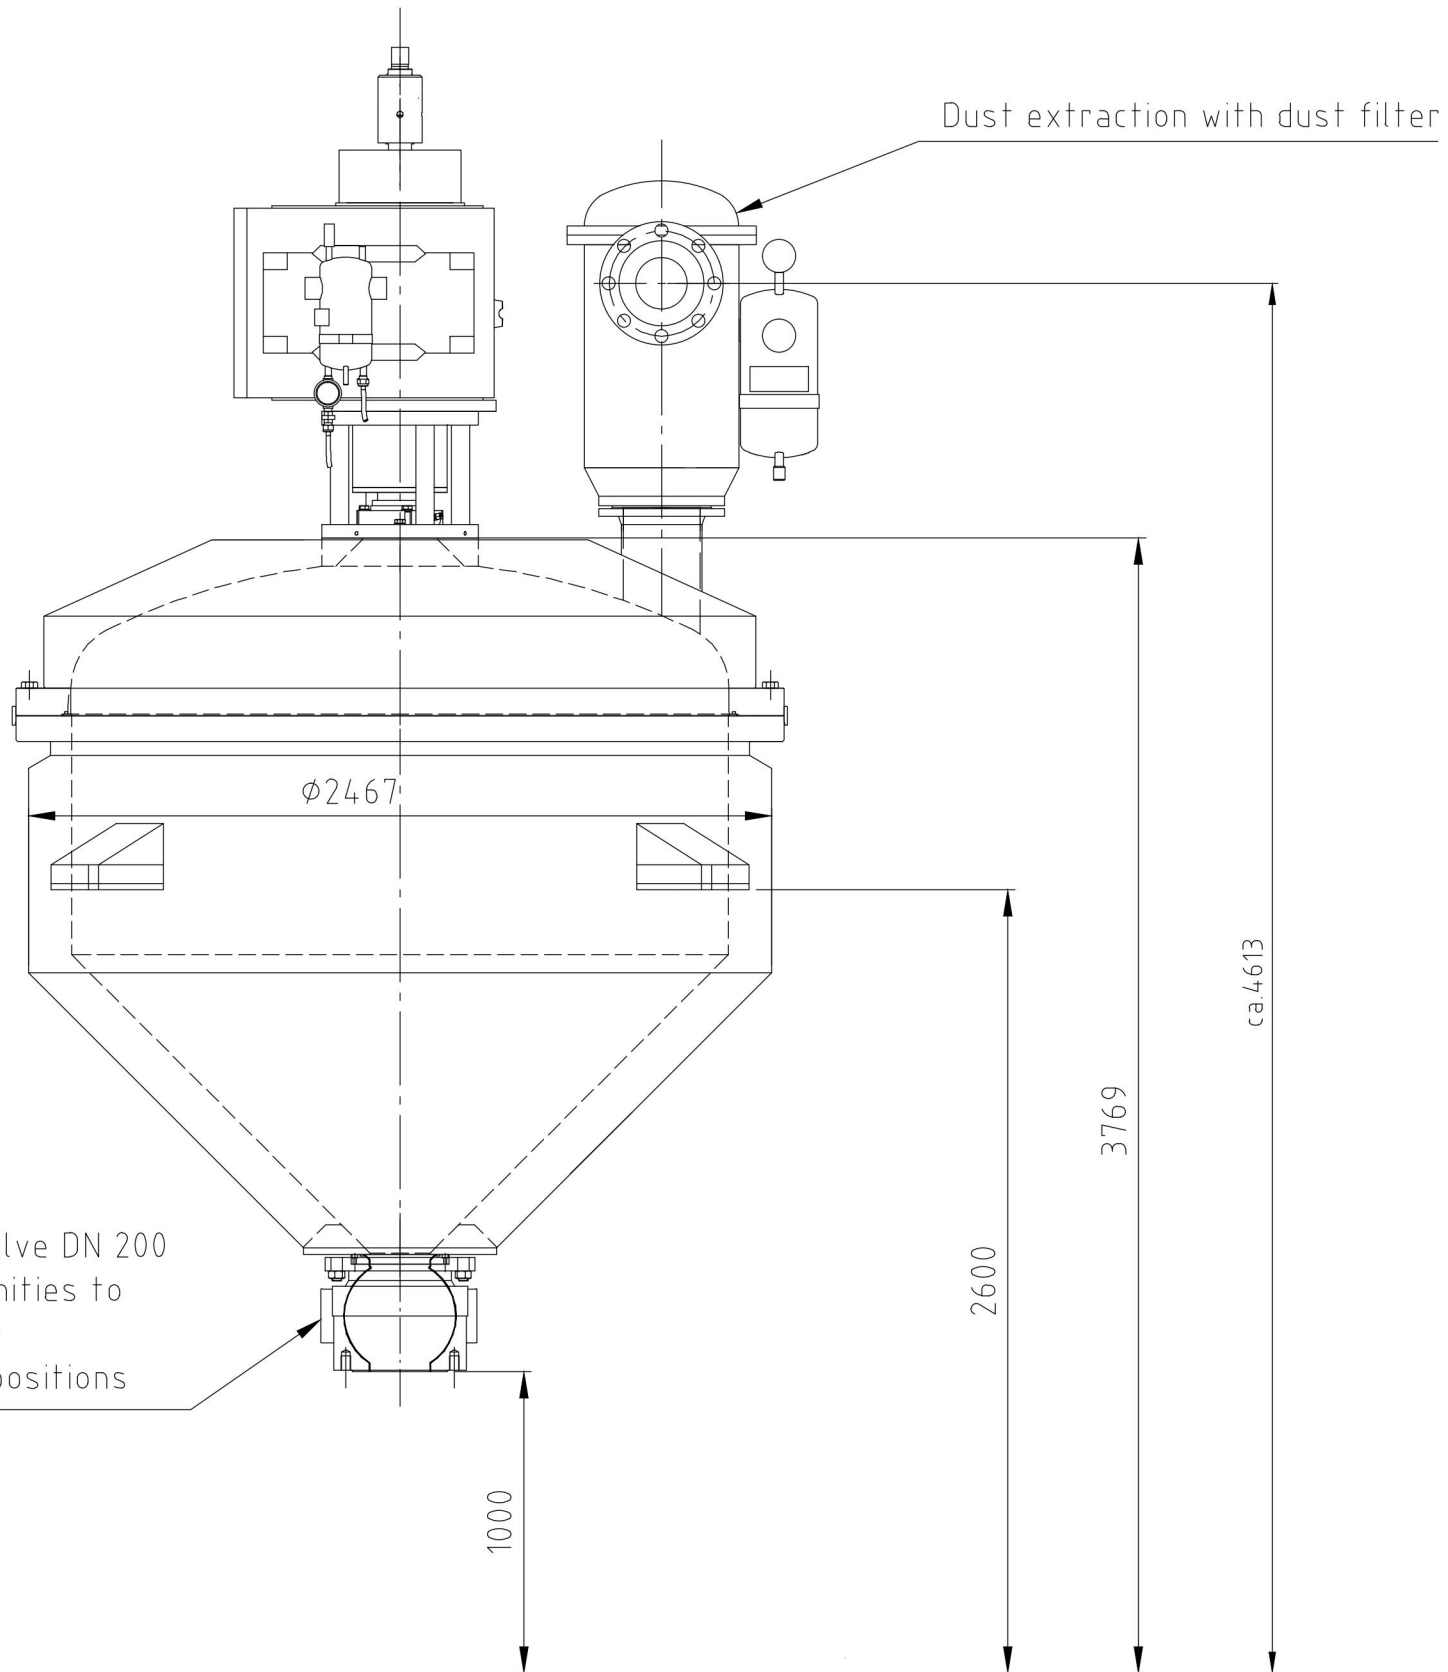

Discharge valve DN 200  
with 2 proximities to  
signalize the  
open/close positions

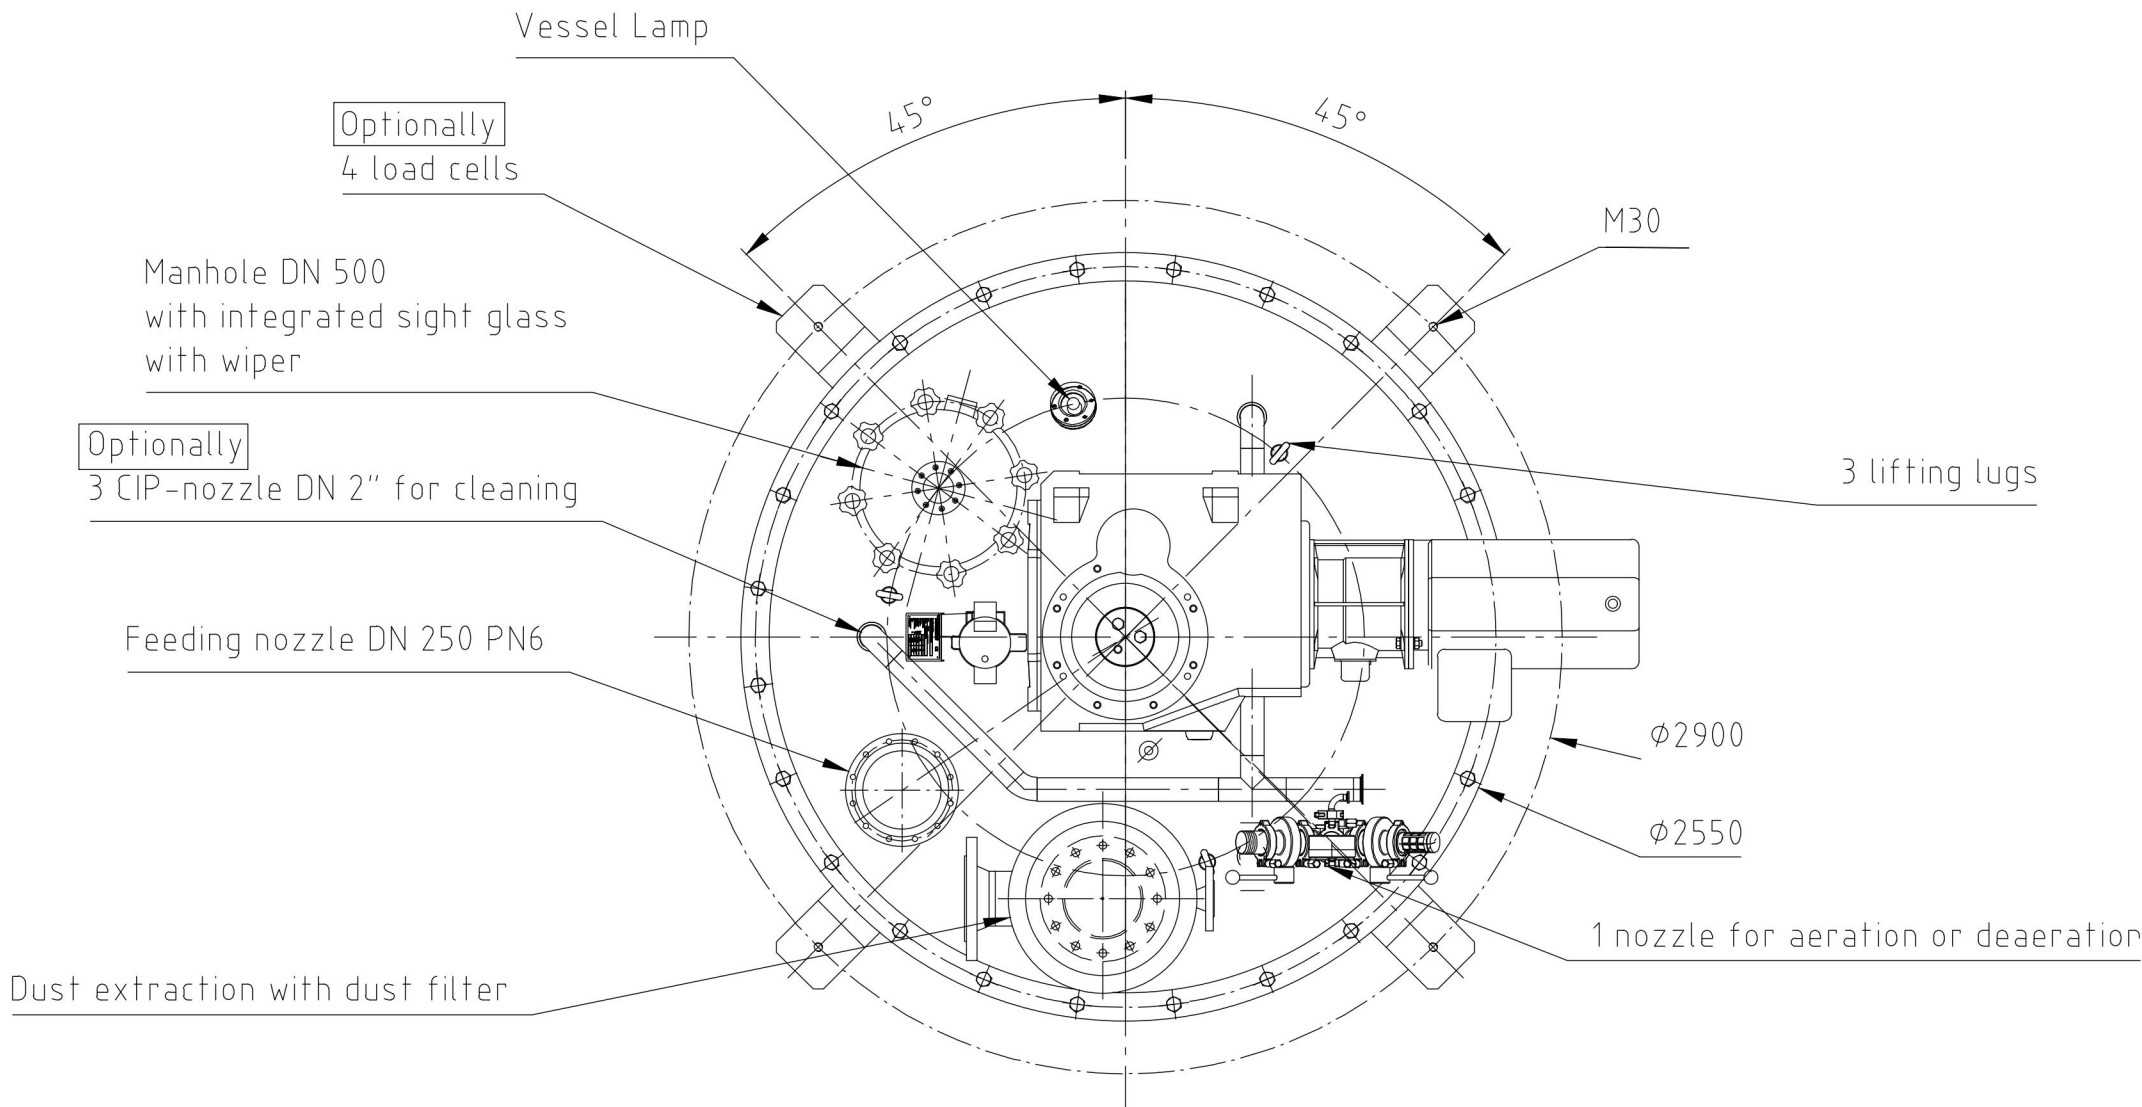

IKA